



DECO FLOOR EP SL



System characteristics: SELF LEVELING EPOXY FLOOR


EPOXFLOOR SL is a low viscosity epoxy self leveling system developed specifically for industrial applications. It is designed to provide optimum application and adhesion properties on properly prepared concrete substrates. EPOXFLOOR SL it's a rigid epoxy floor system with high tensile strength, impact resistance, abrasion resistance, yellow resistance (low yellow) excellent chemical resistance and scratch resistance. EPOXFLOOR SL is mainly used for heavy duty industrial floors.

APPLICATIONS:

Hotels.
Showrooms.
Shops .
Supermarkets.
Offices .
Business centers .
Conference rooms.
Hospitals .
Theaters .
Coffee shops.
Bedrooms .
Residential use.
Garage.

TECHNICAL DATA

Shore D hardness, 0-10 sec	82 DIN 53 505
Tensile strength,(MPa)	(75)
Elongation at break, %	3
Compressive strength, (Mpa)	65 EN 196-1
Flexural Strength	32 EN 196-1
Pull Off Test	Concrete Failure ASTM D4541
Taber abrasion (CS10wheels,1Kg loading)	70mg/1000cycles ASTM D4060

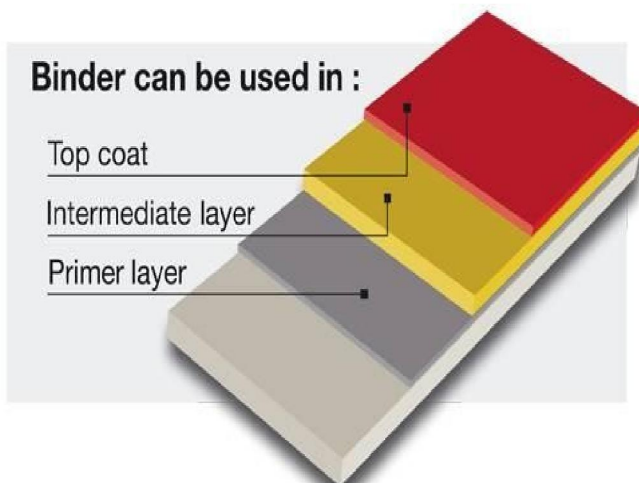

1. PRIMER EPOXFLOOR EP 450
2. EPOXFLOOR SL 2mm
3. TOP COAT SEALCOAT MAT (OPTIONAL)