

DECO FLOOR SF 500 ELASTIC



System characteristics:

Three-layer floor system for concrete and similar substrates.

About 3 - 8 mm layer thickness


APPLICATIONS:

Hotels.
Showrooms.
Shops .
Supermarkets.
Offices .
Business centers .
Conference rooms.
Hospitals .
Theaters .
Coffee shops.
Bedrooms .
Residential use.
Garage.
Production Facilities
Refrigerators

TECHNICAL DATA

Shore D hardness, 0-10 sec	75 ASTM D-2240
Tensile strength, (MPa)	(50)
Elongation at break, %	70
Pull Off Test	Concrete Failure ASTM D4541
Taber abrasion (CS17wheels,1Kg loading)	94mg/1000cycles ASTM D4060
Taber abrasion (CS10wheels,1Kg loading)	72mg/1000cycles ASTM D4060

Decorative Quartz (Double Broadcast) System

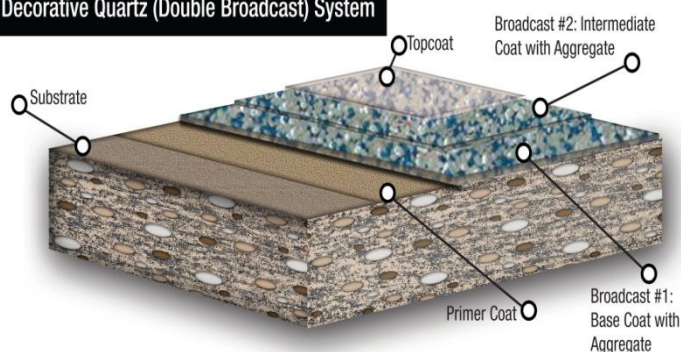

1. PRIMER EPOXFLOOR EP 450
2. BASE COAT EPOXFLOOR EP 350 ELASTIC
3. COLOR QUARTZ BROADCAST
4. TOP COAT EPOXFLOOR EP 350
5. OPTIONAL MAT TOP COAT

Above is shown the 8mm total thickness floor.
System options: 3mm / 5mm / 8mm